

P-9911(J) Fire Telephone Jack




Description

P-9911(J) is telephone jack socket, normally located at various places. Common installation positioning is in the landing levels of all core stairwells and escape routes, although the exact positioning is the responsibility of the project designer. The person on site with a mobile handset may just plug & talk to the control center. The unit should be mounted in a suitable and dry location at about 1.5m from finished floor level.

Technical Specification

- Jack Diameter: 6mm
- Environment Temperature: -10°C to 50°C
- Humidity: <95%, non-condensing
- Dimension: 85mm X 85mm X 12mm

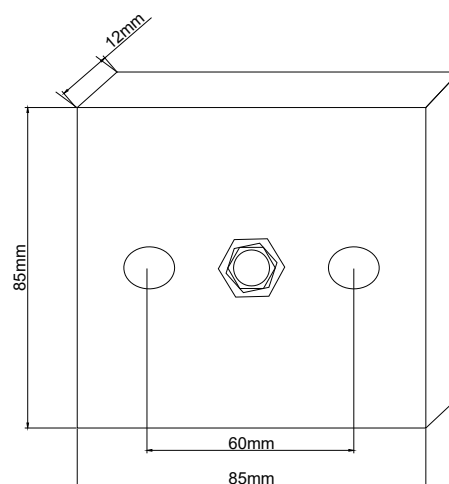

Order Information

Part No.	P-9911(J)
Device Name	Fire Telephone Jack
Product No.	30500143
Compatible Products	GST-FT8WN Fire telephone panel GST-FT24N Fire telephone panel P-9911(M) Mobile fire telephone handset P-9911(H) Hands-free fire telephone handset

IMPORTANT: This publication is a generic version in which product information is shown for informational purposes only and does not constitute a specific commitment or guarantee. We are constantly pursuing the improvement of product technology to improve product performance, for which we reserve the right to adjust the configuration and technical information of the related products without notice. In addition, the description of system performance in this publication applies only to the usual situation. As a result, there may be a variety of unpredictable special circumstances in the real world, so the realization of the relevant product performance will depend on the professional investigation and analysis and the design plan. Please contact us and we will be happy to provide you with professional advice.